

DO NOT SCALE FROM THIS DRAWING.
ALL DIMENSIONS TO BE CHECKED ON SITE.
COPYRIGHT PROTECTED.

TENDER

APPROVED

Wall finishes to be read in conjunction with NFamily procurement guide

REV	DATE	DESCRIPTION	DRAWN	CHKD
02	29.08.23	Column padding colour updated. Minor amendment to finishes in PR04. Approved by Client. Issued for Tender	TC	JFM
01	29.08.23	Datum to PR01 updated. Layout updated to suit latest GA	TC	JFM



NURSERY LOCATION
GREENWICH MV
COUNTRY
ENGLAND

PROJECT
**N FAMILY CLUB
NEW NURSERY**

DRAWING
**PROPOSED ALL FLOORS
WALL FINISHES**


CONSULTANT
LEWIS AND HICKEY
DISCIPLINE DESCRIPTION
ARCHITECTURE

CONSULTANT LOGO
L&H
LEWIS AND HICKEY
18 Farnham Road
Guildford
Surrey
GU1 4XA
Tel: 01483 560908
Fax: 01483 560660
Email: guildford@lewis-hickey.com


SCALE	PAPER SIZE	DATE	DRAWN	CHECKED
1 : 100	A2	08.08.23	TC	JFM

PROJECT No.	DISCIPLINE CODE	DRAWING No.
GMV001	A	163

CONSULTANT PROJECT No.	STATUS	REVISION
G4752	T	02

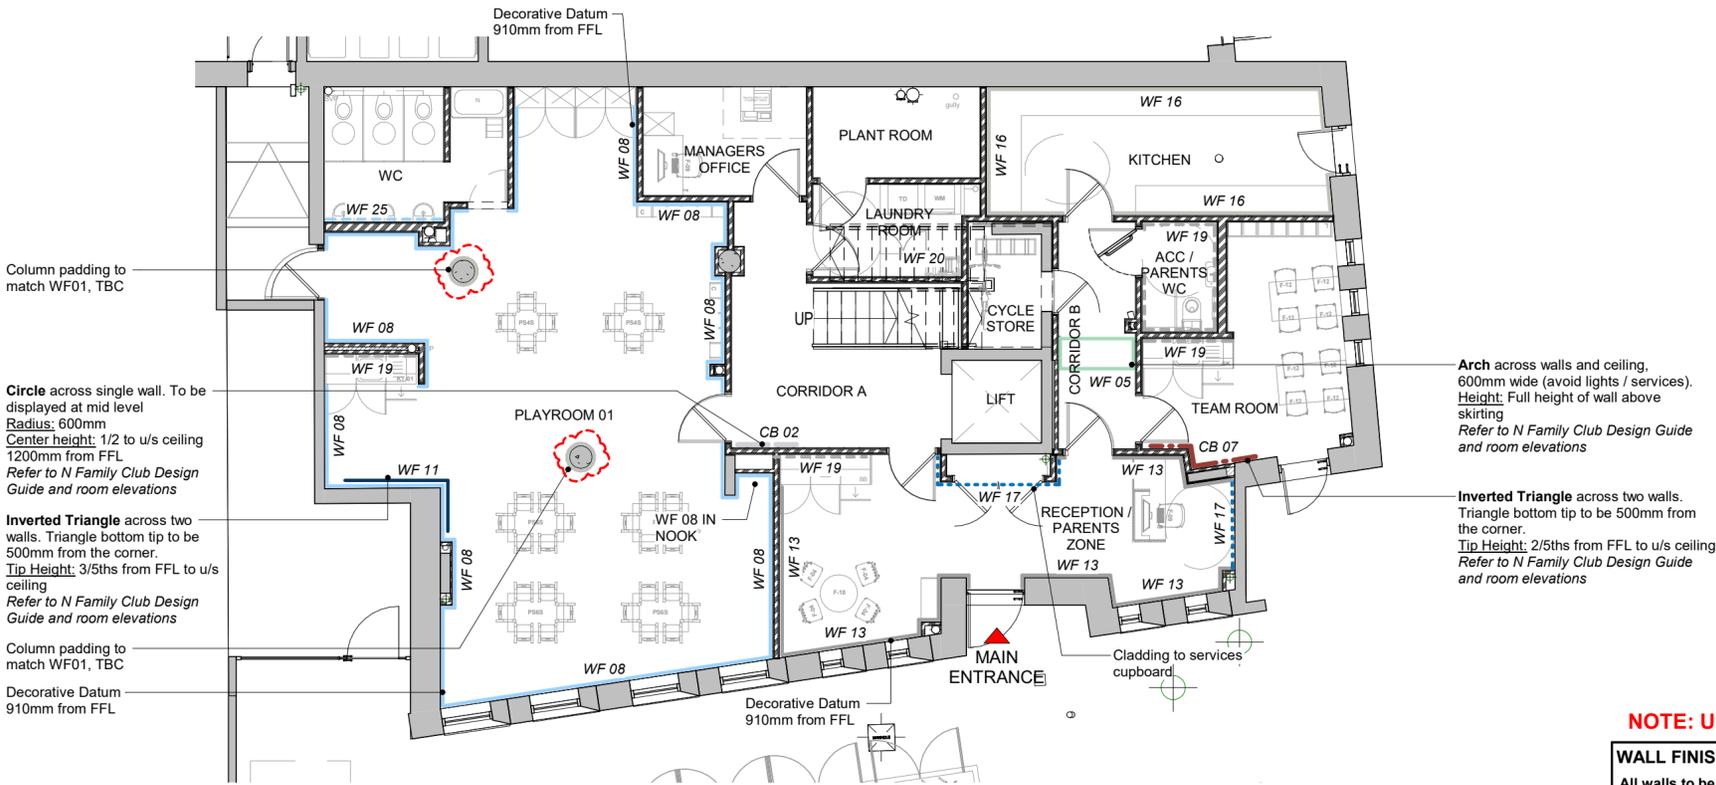

1 PROPOSED GROUND FLOOR WALL FINISHES
163 1 : 100

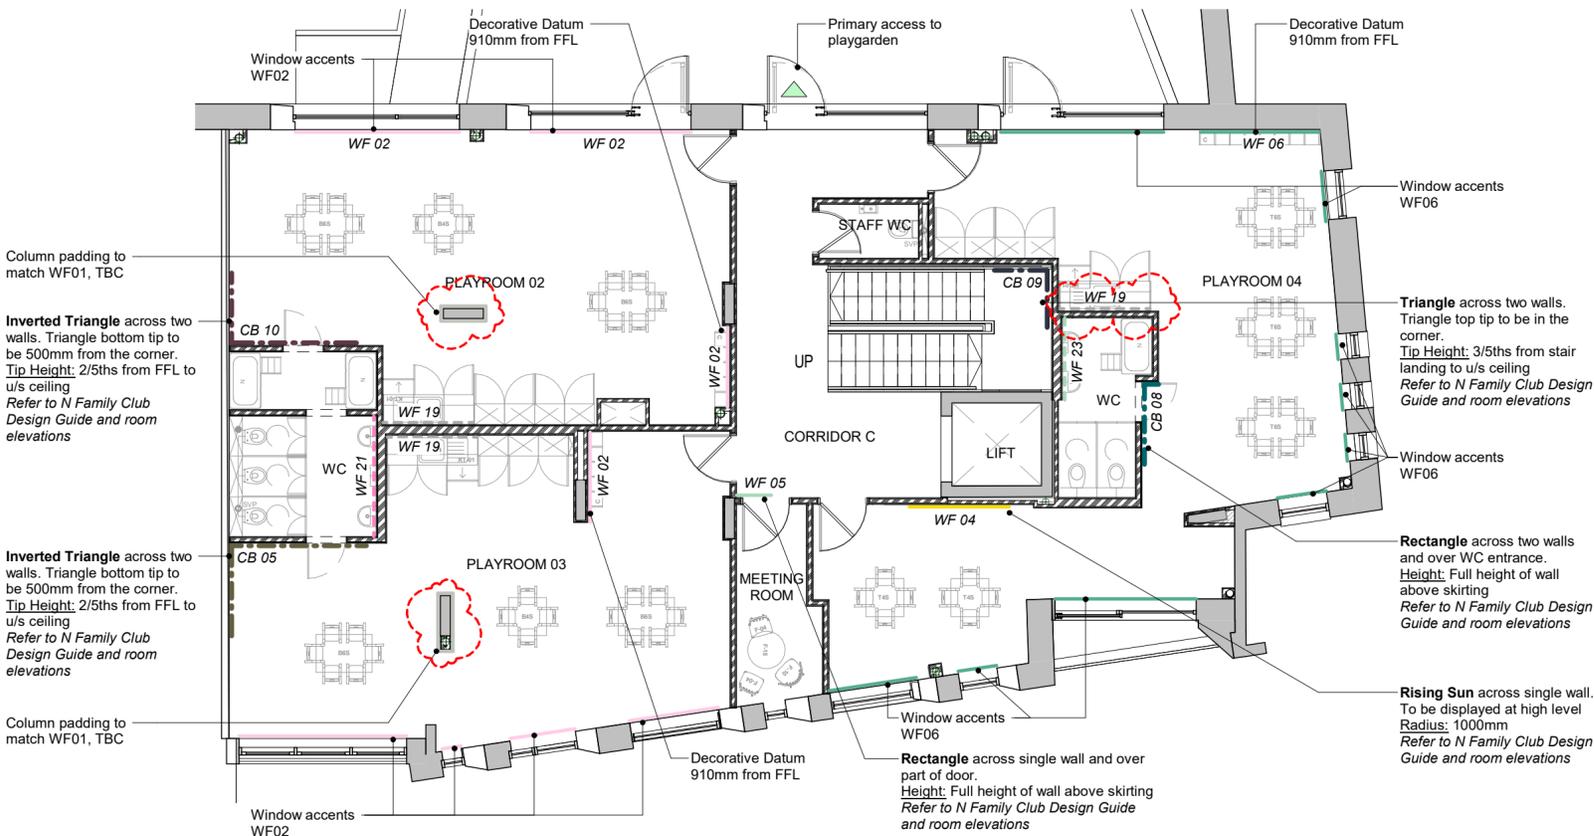

2 PROPOSED FIRST FLOOR WALL FINISHES
163 1 : 100

NOTE: UPDATED DULUX PAINT COLOUR CODES AS BELOW

WALL FINISHES KEY
All walls to be painted up to underside of ceiling in WF 01 (General wall finish).
Decorative datum taken from top of skirting to circa 910mm AFFL (to line through with kitchen worktops), location and colour as indicated on plan. Also refer to room elevation drawings.
All walls to receive 1no. coat of undercoat and 2no. full coats of Dulux Sterishield Diamond Matt paint.

WF 01	General Wall Finishes Paint Dulux Sterishield Diamond Matt Colour: 15719 / 50YY 73/035	WF 19	General Tiles Mosa - Grey / 15820 010030 Grout Colour: Mapei 111 Silver Grey Dimensions: 300 x 100 x 7.8mm
WF 02	Baby 1 Wall Paint Dulux Sterishield Diamond Matt Colour: 21YR 67/074	WF 20	General Tiles Mosa - White / 15810 010030 Grout Colour: Mapei 100 Bianco White Dimensions: 300 x 100 x 7.8mm
WF 04	Baby 2 Wall Paint Dulux Sterishield Diamond Matt Colour: 54YY 71/171	WF 21	Baby 1 Tiles Mosa Pink / 15180 015015 Grout Colour: Mapei 141 Caramel Dimensions: 150 x 150 x 5.6mm
WF 05	Toddler 1 Wall Paint Dulux Sterishield Diamond Matt Colour: 50GG 63/042	WF 22	Baby 2 Tiles Mosa - Yellow / 15070 015015 Grout Colour: Mapei 131 Vanilla Dimensions: 150 x 150 x 5.6mm
WF 06	Toddler 2 Wall Paint Dulux Sterishield Diamond Matt Colour: 54GG 47/053	WF 23	Toddler 1 Tiles Mosa Turquoise / 15100 015015 Grout Colour: Mapei 171 Turquoise Dimensions: 150 x 150 x 5.6mm
WF 08	Pre-School 1 Wall Paint Dulux Sterishield Diamond Matt Colour: 10BB 55/065	WF 24	Toddler 2 Tiles Mosa - Olive Green / 15080 015015 Grout Colour: Mapei 181 Jade Green Dimensions: 150 x 150 x 5.6mm
WF 11	Pre-School 2 Wall Paint Dulux Sterishield Diamond Matt Colour: 10BB 09/155	WF 25	Pre-School 1 Tiles Mosa - Blue / 15130 015015 Grout Colour: Mapei 170 Crocus Blue Dimensions: 150 x 150 x 5.6mm
WF 13	Reception/Circulation Datum Dulux Sterishield Diamond Matt Colour: 30GY 56/023	WF 26	Pre-School 2 Tiles Mosa - Navy / 15120 015015 Grout Colour: Mapei 283 Sea Blue Dimensions: 150 x 150 x 5.6mm
WF 16	Main Kitchen Laminate WhiteRock Altro Satins Code: Cesco 53	WF 27	Breakfast Bar and Parent Area Tiles British Ceramic Tile - Green / BCT14247 Grout Colour: Mapei 111 Silver Grey Dimensions: 300 x 100 x 6mm
WF 17	Reception Timber Slats ISG MDF vertical slats Colour: Cobalt Blue RAL5013 10% gloss	WF 28	Specialist Room Mosa - White / 15010 010010 Grout Colour: Mapei 283 Sea Blue Dimensions: 100 x 100 x 7mm

COLOUR BLOCKING KEY

CB 01 (WF 06)	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 54GG 47/053	CB 06	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 20YY 23/525
CB 02	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 30RB 50/072	CB 07	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 30YR 14/365
CB 03 (WF 02)	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 21YR 67/074	CB 08	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 10BG 13/156
CB 04	Colour Block Wall Paint Dulux Sterishield Diamond Matt Colour: 54YY 71/171	CB 09	Colour Block Wall Paint Farrow & Ball, Matt Colour: Railings (31)
CB 05	Colour Block Wall Paint Farrow & Ball, Matt Colour: Bancha (298)	CB 10	Colour Block Wall Paint Farrow & Ball, Matt Colour: Brinjal (222)

NOTE: All Farrow & Ball paint references to be matched to closest Dulux colour reference in store